


Y Δ - Schützekombinationen



Stern-Dreieck-Starter 4 - 90kW AC3


IP 00

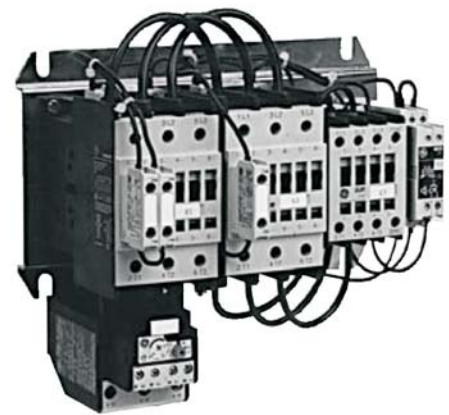

Serie CL-Stern-Dreieck-Starter

Motorleistung Kategorie AC-3		Einstellbereich		Artikel Nr.
380/400V kW	HP	Min A	Max A	
4	5,5	4	6,3	01-40
5,5	7,5	5,5	8,5	01-55
7,5	10	8	12	01-75
11	15	10	16	01-110
15	20	14,5	18	01-150
18,5	25	21	26	01-185
22	30	21	26	01-220
30	40	30	40	01-300
37	50	30	43	01-370
45	60	42	55	01-450
55	75	54	65	01-550
75	100	78	97	01-750
90	125	90	110	01-900

110 - 750kW AC3



Auf Anfrage

In Gehäuse komplett IP 65



Serie CL-Stern-Dreieck-Starter


Motorleistung Kategorie AC-3		Einstellbereich		Artikel Nr.
380/400V kW	HP	Min A	Max A	
4	5,5	4	6,3	01-40G
5,5	7,5	5,5	8,5	01-55G
7,5	10	8	12	01-75G
11	15	10	16	01-110G
15	20	14,5	18	01-150G
18,5	25	21	26	01-185G
22	30	21	26	01-220G
30	40	30	40	01-300G

Steuerspannungen V, 50 Hz

24 42 48 110 230 240 400 415 440 500 690



Serie CL-Stern-Dreieck-Starter

IP 00



	A	B	C	D
4 - 11kW	160	220	110	130
15 - 30kW	180	240	110	135
37-55kW	225	285	145	190
75kW	245	305	155	190
90kW	245	305	155	190

IP 65



	A	B	C	D
4 - 30kW	300	282	170	300